

3 Sources of hazards6

CHAPTER 11 ±VOYAGE PLANNING	26
11.1 Goal	26
11.2 Functional requirement	26
11.3 Requirements	26
CHAPTER 12 ±MANNING AND TRAINING	27
12.1 Goal	27
12.2 Functional requirements	27
12.3 Regulations	27
PART I-B	29
ADDITIONAL GUIDANCE REGARDING THE PROVISIONS OF THE INTRODUCTION AND PART I-A	29
1 ADDITIONAL GUIDANCE TO SECTION 2 (DEFINITIONS) OF THE INTRODUCTION.....	29
2 ADDITIONAL GUIDANCE TO CHAPTER 1 (GENERAL)	30
3 ADDITIONAL GUIDANCE TO CHAPTER 2 (POLAR WATER OPERATIONAL MANUAL (PWOM))	31
3.1 Recommendation on the content of the Polar Water Operational Manual	31
3.2 Guidance on navigation with icebreaker assistance	31
3.3 Guidance on the development of contingency plans	32
4 ADDITIONAL GUIDANCE TO CHAPTER 3 (SHIP STRUCTURE)	32
5 ADDITIONAL GUIDANCE TO CHAPTER 4 (SUBDIVISION AND STABILITY)	33
6 ADDITIONAL GUIDANCE TO CHAPTER 5 (WATERTIGHT AND WEATHER TIGHT INTEGRITY).....	33
7 ADDITIONAL GUIDANCE TO CHAPTER 6 (MACHINERY INSTALLATIONS)	34
8 A99.264 509.23 Tm [(A)] TJ ET BT /F3 8.04 Tf 1 0 0 1 106.22 509.23 Tm [(99.264 509.23 Tm [(A)] TJ ET BT ET BT /F3 9.96 Tf 1 0	

2.2 Category B ship means a ship not included in category A, designed for operation in polar waters in at least thin first-year ice, which may include old ice inclusions.

2.3 Category C ship means a ship designed to operate in open water or in ice conditions less severe than those included in categories A and B.

2.4 First-year ice means sea ice of not more than one winter growth developing from young ice with thickness from 0.3 m to 2.0 m¹.

2.5 Ice free waters

- .3 low temperature, as it affects the working environment and human performance, maintenance and emergency preparedness tasks, material properties and equipment efficiency, survival time and performance of safety equipment and systems;
- .4 extended periods of darkness or daylight as it may affect navigation and human performance;
- .5

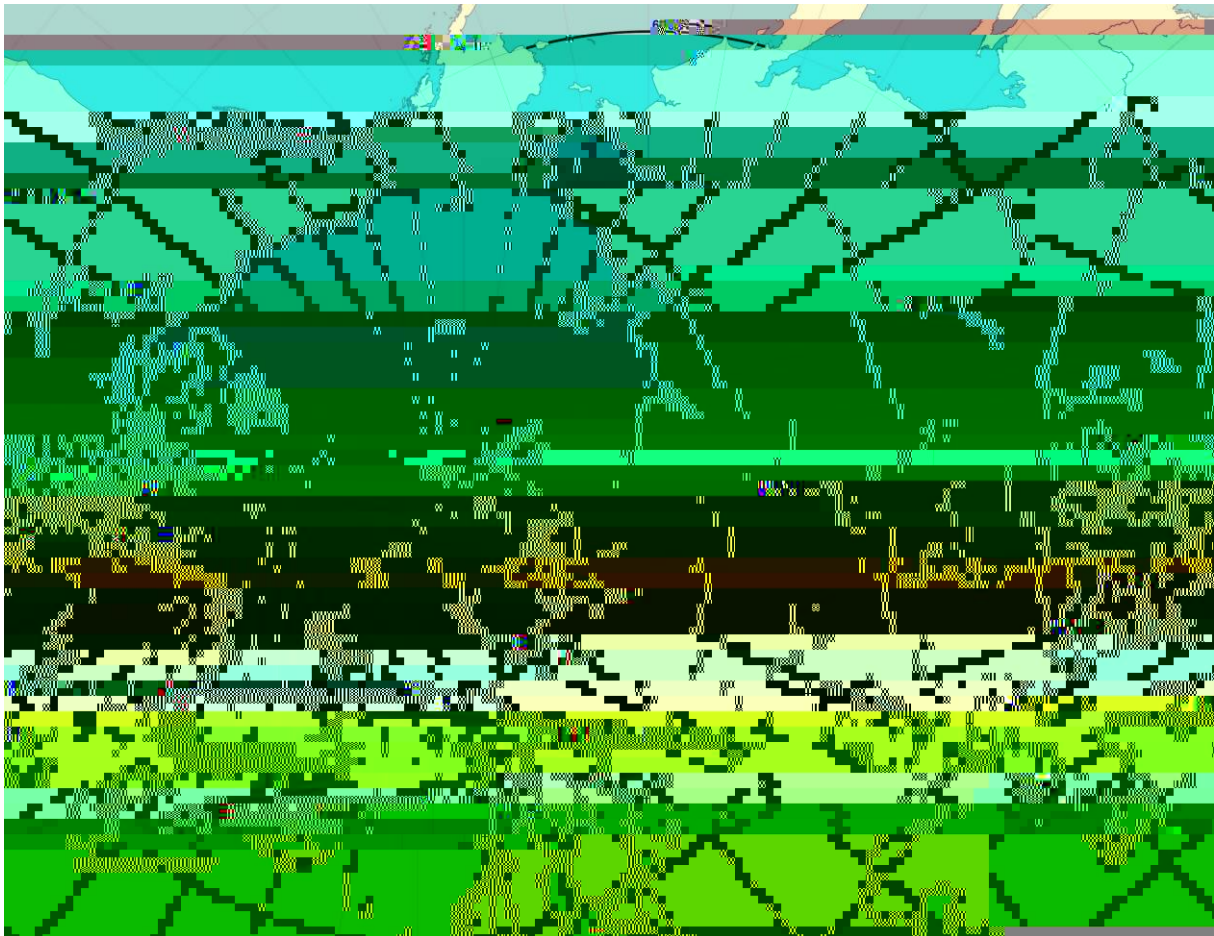


Figure 2 ±Maximum extent of Arctic wateate

1.2.9 Mean Daily Low Temperature (MDLT) means the mean value of the daily low

2.2.3 The Manual shall include or refer to specific procedures to be followed in normal operations and in order to avoid encountering conditions that exceed the ship's capabilities.

2.2.4 The Manual shall include or refer to specific procedures to be followed in the event of incidents in polar waters.

2.2.5 The Manual shall include or refer to specific procedures to be followed in the event that conditions are encountered which exceed the ship's specific capabilities and limitations in paragraph 2.2.2.

2.2.6 The Manual shall include or refer to procedures to be followed when using icebreaker assistance, as applicable.

2.3 Regulations

2.3.1 In order to comply with the functional requirements of paragraphs 2.2.1 to 2.2.6, the Manual shall be carried on board.

2.3.2 In order to comply with the functional requirements of paragraph 2.2.2, the Manual shall contain, where applicable, the methodology used to determine capabilities and limitations in ice.

2.3.3 In order to comply with the functional requirements of paragraph 2.2.3, the Manual shall include risk-based procedures for the following:

- .1 voyage planning to avoid ice and/or temperatures that exceed the ship's design capabilities or limitations;
- .2 arrangements for receiving forecasts of the environmental conditions;
- .3 means of addressing any limitations of the hydrographic, meteorological and navigational information available;
- .4 operation of equipment required under other chapters of this Code; and
- .5 implementation of special measures to maintain equipment and system functionality under low temperatures, topside icing and the presence of sea ice, as applicable.

2.3.4 In order to comply with the functional requirements of paragraph 2.2.4, the Manual shall include risk-based procedures to be followed for:

- .1 contacting emergency response providers for salvage, search and rescue (SAR), spill response, etc., as applicable; and
- .2 in the case of ships ice strengthened in accordance with chapter 3, procedures for maintaining life support and ship integrity in the event of prolonged entrapment by ice.

2.3.5 In order to comply with the functional requirements of paragraph 2.2.5, the Manual shall include risk-based procedures to be followed for measures to be taken in the event of encountering ice and/or temperatures which exceed the ship's design capabilities or limitations.

- .3 scantlings of ice strengthened category C ships shall be approved by the Administration, or a recognized organization accepted by it, taking into account acceptable standards adequate for the ice types and concentrations encountered in the area of operation; and
- .4 a category C ship need not be ice strengthened if, in the opinion of the Administration, the ship's structure is adequate for its intended operation.

CHAPTER 4 ~~S~~SUBDIVISION AND STABILITY

4.1 Goal

The goal of this chapter is to ensure adequate subdivision and stability in both intact and damaged conditions.

4.2 Functional requirements

In order to achieve the goal set out in paragraph 4.1 above, the following functional requirements are embodied in the regulations of this chapter:

- .1 ships shall have sufficient stability in intact conditions when subject to ice accretion; and
- .2 ships of category A and B, constructed on or after 1 January 2017, shall have sufficient residual stability to sustain ice-related damages.

4.3 Regulations

4.3.1 Stability in intact conditions

4.3.1.1 In order to comply with the functional requirement of paragraph 4.2.1, for ships operating in areas and during periods where ice accretion is likely to occur, the following icing allowance shall be made in the stability calculations:

- .1 30 kg/m² on exposed weather decks and gangways;
- .2 7.5 kg/m² for the projected lateral area of each side of the ship above the water plane; and
- .3 the projected lateral area of discontinuous surfaces of rail, sundry booms, spars (except masts) and rigging of ships having no sails and the projected lateral area of other small objects shall be computed by increasing the total projected area of continuous surfaces by 5% and the static moments of this area by 10%.

4.3.1.2 Ships operating in areas and during periods where ice accretion is likely to occur shall be:

- .1 designed to minimize the accretion of ice; and
- .2 equipped with such means for removing ice as the Administration may require; for example, electrical and pneumatic devices, and/or special tools such as axes or wooden clubs for removing ice from bulwarks, rails and erections.

4.3.1.3 Information on the icing allowance included in the stability calculations shall be given in the PWOM.

4.3.1.4 Ice accretion shall be monitored and appropriate measures taken to ensure that the ice accretion does not exceed the values given in the PWOM.

4.3.2 Stability in damaged conditions

4.3.2.1 In order to comply with the functional requirements of paragraph 4.2.2, ships of categories A and B, constructed on or after 1 January 2017, shall be able to withstand flooding resulting from hull penetration due to ice impact. The residual stability following ice damage shall be such that the factor s_i , as defined in SOLAS regulations II-1/7-2.2 and II-1/7-2.3, is equal to one for all loading conditions used to calculate the attained subdivision index in SOLAS regulation II-1/7. However, for cargo ships that comply with subdivision and damage stability regulations in another instrument developed by the Organization, as provided by SOLAS regulation II-1/4.1, the residual stability criteria of that instrument shall be met for each loading condition.

4.3.2.2 The ice damage extents to be assumed when demonstrating compliance with paragraph 4.3.2.1 shall be such that:

- .1 the longitudinal extent is 4.5% of the upper ice waterline length if centred

.2 watertight and weathertight doors, hatches and closing devices

- .2 working liquids shall be maintained in a viscosity range that ensures operation of the machinery; and
- .3 seawater supplies for machinery systems shall be designed to prevent ingestion of ice,⁹ or otherwise arranged to ensure functionality.

6.3.2 In addition, for ships intended to operate in low air temperatures, the following apply:

- .1 in order to comply with the functional requirement of paragraph 6.2.1.2 above, exposed machinery and electrical installation and appliances shall function at the polar service temperature;
- .2 in order to comply with the functional requirement of paragraph 6.2.1.2.1 above, means shall be provided to ensure that combustion air for internal combustion engines driving essential machinery is maintained at a temperature in compliance with the criteria provided by the engine manufacturer; and
- .3 in order to comply with the functional requirements of paragraph 6.2.1.2.2 above, materials of exposed machinery and foundations shall be approved by the Administration, or a recognized organization accepted by it, taking into account standards acceptable to the Organization^{10,11} or other standards offering an equivalent level of safety based on the polar service temperature.

6.3.3 In addition, for ships ice strengthened in accordance with chapter 3, in order to comply with the functional requirements of paragraph 6.2.1.3 above, the following apply:

- .1 scantlings of propeller blades, propulsion line, steering equipment and other appendages of category A ships shall be approved by the Administration, or a recognized organization accepted by it, taking into account standards acceptable to the Organization¹⁰ or other standards offering an equivalent level of safety;
- .2 scantlings of propeller blades, propulsion line, steering equipment and other appendages of category B ships shall be approved by the Administration, or a recognized organization accepted by it, taking into account standards acceptable to the Organization¹¹ or other standards offering an equivalent level of safety; and
- .3 scantlings of propeller blades, propulsion line, steering equipment and other appendages of ice-strengthened category C ships shall be approved by the Administration, or a recognized organization accepted by it, taking into account acceptable standards adequate with the ice types and concentration encountered in the area of operation.

⁹ Refer to MSC/Circ.504, Guidance on design and construction of sea inlets under slush ice conditions.

¹⁰ Refer to Polar Class 1 ~~5~~ of IACS URI Requirements concerning Polar Class (2011).

¹¹ Refer to Polar Class 6 ~~7~~ of IACS URI Requirements concerning Polar Class (2011).

CHAPTER 7 ±FIRE SAFETY/PROTECTION

7.1 Goal

The goal of this chapter is to ensure that fire safety systems and appliances are effective and operable, and that means of escape remain available so that persons on board can safely and swiftly escape to the lifeboat and liferaft embarkation deck under the expected environmental conditions.

7.2 Functional requirements

7.2.1 In order to achieve the goal set out in paragraph 7.1 above, the following functional requirements are embodied in the regulations of this chapter:

- .1 all components of fire safety systems and appliances if installed in exposed positions shall be protected from ice accretion and snow accumulation;
- .2 local equipment and machinery controls shall be arranged so as to avoid freezing, snow accumulation and ice accretion and their location to remain accessible at all time;
- .3 the design of fire safety systems and appliances shall take into consideration the need for persons to wear bulky and cumbersome cold weather gear, where appropriate;
- .4 means shall be provided to remove or prevent ice and snow accretion from accesses; and
- .5 extinguishing media shall be suitable for intended operation.

7.2.2 In addition, for ships intended to operate in low air temperature, the following apply:

- .1 all components of fire safety systems and appliances shall be designed to ensure availability and effectiveness under the polar service temperature; and
- .2 materials used in exposed fire safety systems shall be suitable for operation at the polar service temperature.

7.3 Regulations

7.3.1 In order to comply with the requirement of paragraph 7.2.1.1, the following apply:

- .1 isolating and pressure/vacuum valves in exposed locations are to be protected from ice accretion and remain accessible at all time; and
- .2 all two-way portable radio communication equipment shall be operable at the polar service temperature.

7.3.2 In order to comply with the requirement of paragraph 7.2.1.2, the following apply:

- .1 fire pumps including emergency fire pumps, water mist and water spray pumps shall be located in compartments maintained above freezing;
- .2 the fire main is to be arranged so that exposed sections can be isolated and means of draining of exposed sections shall be provided. Fire hoses and nozzles need not be connected to the fire main at all times, and may be stored in protected locations near the hydrants;

- .3 firefighter's outfits shall be stored in warm locations on the ship; and
- .4 where fixed water-based firefighting systems are located in a space separate from the main fire pumps and use their own independent sea suction, this sea suction is to be also capable of being cleared of ice accumulation.

7.3.3 In addition, for ships intended to operate in low air temperature, the following apply:

- .1 In order to comply with the requirement of paragraph 7.2.2.1, portable and semi-portable extinguishers shall be located in positions protected from freezing temperatures, as far as practical. Locations subject to freezing are to be provided with extinguishers capable of operation under the polar service temperature.
- .2 In order to comply with the functional requirements of paragraph 7.2.2.2 above, materials of exposed fire safety systems shall be approved by the Administration, or a recognized organization accepted by it, taking into account standards acceptable to the Organization¹² or other standards offering an equivalent level of safety based on the polar service temperature.

CHAPTER 8 ±LIFE-SAVING APPLIANCES AND ARRANGEMENTS

8.1 Goal

The goal of this chapter is to provide for safe escape, evacuation and survival.

8.2 Functional requirements

In order to achieve the goal set out in paragraph 8.1 above, the following functional requirements are embodied in the regulations of this chapter:

8.2.1 Escape

8.2.1.1 Escape routes shall be provided for the crew and passengers in accordance with the requirements of paragraph 8.2.1.2.

8.3.3 Survival

8.3.3.1

- .6 passengers shall be instructed in the use of the personal survival equipment and the action to take in an emergency; and

- .2 ships shall comply with SOLAS regulation V/22.1.9.4, irrespective of the date of construction and the size and, depending on the bridge configuration, a clear view astern;
- .3 for ships operating in areas, and during periods, where ice accretion is likely to occur, means to prevent the accumulation of ice on antennas required for navigation and communication shall be provided; and
- .4 in addition, for ships ice strengthened in accordance with chapter 3, the following apply:
 - .1 where equipment required by SOLAS chapter V or this chapter have sensors that project below the hull, such sensors shall be protected against ice; and
 - .2 in category A and B ships constructed on or after 1 January 2017, the bridge wings shall be enclosed or designed to protect navigational equipment and operating personnel.

9.3.2.2 In order to comply with the functional requirement of paragraph 9.2.2.2 above, the following apply:

- .1 ships shall have two non-magnetic means to determine and display their

10.2 Functional requirements

In order to achieve the goal set out in paragraph 10.1 above, the following functional requirements are embodied in the regulations of this chapter.

10.2.1 Ship communication

10.2.1.1 Two-way voice and/or data communications ship-to-ship and ship-to-shore shall be available at all points along the intended operating routes.

10.2.1.2 Suitable means of communications shall be provided where escort and convoy operations are expected.

10.2.1.3 Means for two-way on-scene and SAR coordination communications for search and rescue purposes including aeronautical frequencies shall be provided.

10.2.1.4 Appropriate communication equipment to enable telemedical assistance in polar areas shall be provided.

10.2.2 Survival craft and rescue boat communications capabilities

10.2.2.1 For ships intended to operate in low air temperature, all rescue boats and lifeboats,

- .3 current information on the extent and type of ice and icebergs in the vicinity of the intended route;
- .4 statistical information on ice and temperatures from former years;
- .5 places of refuge;
- .6 current information and measures to be taken when marine mammals are encountered relating to known areas with densities of marine mammals, including seasonal migration areas;¹³
- .7 current information on relevant ships' routing systems, speed recommendations and vessel traffic services relating to known areas with densities of marine mammals, including seasonal migration areas;¹⁴
- .8 national and international designated protected areas along the route; and
- .9 operation in areas remote from search and rescue (SAR) capabilities.¹⁵

CHAPTER 12 ±

Ice conditions	Tankers	Passenger ships	Other
Ice Free	Not applicable	Not applicable	Not applicable
Other waters	Advanced training f/F1		

- .3 position of a ship in the ice convoy should be determined by the icebreaker rendering the assistance;
- .4 ship within the ice convoy, in accordance with the instructions of the icebreaker rendering the assistance, should establish communication with the icebreaker by VHF channel indicated by the icebreaker;
- .5 the ship, while navigating in the ice convoy, should ensure compliance with the instructions of the icebreaker;
- .6 position in the ice convoy, speed and distance to a ship ahead should be as instructed by the icebreaker;
- .7 the ship should immediately notify the icebreaker of any difficulties to maintain the position within the ice convoy, speed and/or distance to any other ship in the ice convoy; and
- .8 the ship should immediately report to the icebreaker of any damage.

3.3 Guidance on the development of contingency plans

In developing the ship's contingency plans ships should consider damage control measures arrangements for emergency transfer of liquids and access to tanks and spaces during salvage operations.

See also additional guidance to chapter 9.

4 ADDITIONAL GUIDANCE TO CHAPTER 3 (SHIP STRUCTURE)

3 The scope of a simplified equivalency assessment (referring to paragraphs 6.1 to 6.3 below) is expected to be limited to materials selection, structural strength of the hull and propulsion machinery.

4 If there is not full and direct compliance, then an equivalent level of risk can be accepted in accordance with guidance provided by the Organization. An increase in the probability of an event can be balanced by a reduction in its consequences. Alternatively, a reduction in probability could potentially allow acceptance of more serious consequences. Using a hull area example, a local shortfall in strength level or material grade could be accepted if the internal compartment is a void space, for which local damage will not put the overall safety of the ship at risk or lead to any release of pollutants.

5 For existing ships, service experience can assist in risk assessment. As an example, for an existing ship with a record of polar ice operations a shortfall in the extent of the ice belt (hull areas) may be acceptable if there is no record of damage to the deficient area; i.e. a ship that would generally meet PC 5 requirements but in limited areas is only PC 7 could still be considered as a category A, PC 5 ship. In all such cases, the ship's documentation should make clear the nature and scope of any deficiencies.

6 The process includes the following stages of assessment:

- .1 select the target Polar Class for equivalency;
- .2 compare materials used in the design with minimum requirements under the IACS Polar Class URs; identify any shortfalls; and
- .3 compare strength levels of hull and machinery components design with requirements under the IACS Polar Class URs; quantify levels of compliance.

7 Where gaps in compliance are identified in steps 1 to 3, additional steps should be necessary to demonstrate equivalency, as outlined below:

- .4 identify any risk mitigation measures incorporated in the design of the ship (over and above the requirements of the Code and IACS URs);
- .5 where applicable, provide documentation of service experience of existing ships, in conditions relevant to the target ice class for equivalency; and
- .6 undertake an assessment, taking into account information from steps 1 to 5, as applicable, and on the principles outlined in paragraphs 2 to 6 above.

8 Documentation provided with an application for equivalency should identify each stage that has been undertaken, and sufficient supporting information to validate assessments.

9 Where a ship in categories A or B is provided with an equivalency for ice class by its flag State, this should be noted in its Polar Ship Certificate.

5 ADDITIONAL GUIDANCE TO CHAPTER 4 (SUBDIVISION AND STABILITY)

No additional guidance

6 ADDITIONAL GUIDANCE TO CHAPTER 5 (WATERTIGHT AND WEATHER TIGHT INTEGRITY)

7 ADDITIONAL GUIDANCE TO CHAPTER 6 (MACHINERY INSTALLATIONS)

Refer to additional guidance to chapter 3.

8 ADDITIONAL GUIDANCE TO CHAPTER 7 (FIRE SAFETY/PROTECTION)

No additional guidance.

9 ADDITIONAL GUIDANCE TO CHAPTER 8 (LIFE-SAVING APPLIANCES AND ARRANGEMENTS)

9.1 Sample personal survival equipment

When considering resources to be included with the personal survival equipment, the following should be taken into account:

Suggested equipment
Protective clothing (hat, gloves, socks, face and neck protection, etc.)
Skin protection cream
Thermal protective aid
Sunglasses
Whistle
Drinking mug
Penknife
Polar survival guidance
Emergency food
Carrying bag

9.2 Sample group survival equipment

When considering resources to be included in the group survival equipment, the following should be taken into account:

Suggested equipment
Shelter ±tents or storm shelters or equivalent ±sufficient for maximum number of persons
Thermal protective aids or similar ±sufficient for maximum number of persons
Sleeping bags ±sufficient for at least one between two persons
Foam sleeping mats or similar ±sufficient for at least one between two persons
Shovels ±at least 2
Sanitation (e.g. toilet paper)
Stove and fuel ± sufficient for maximum number of persons ashore and maximum anticipated time of rescue

Suggested equipment
Emergency food ± sufficient for maximum number of persons ashore and maximum anticipated time of rescue
Flashlights ±one per shelter
Waterproof and windproof matches ±two boxes per shelter
Whistle
Signal mirror
Water containers & water purification tablets
Spare set of personal survival equipment
Group survival equipment container (waterproof and floatable)

10 ADDITIONAL GUIDANCE TO CHAPTER 9 (SAFETY OF NAVIGATION)

10.4 0 1x q 6 9 (t) -

10.4 Ships should be fitted with:

- .1 a suitable means to de-ice sufficient conning position windows to provide unimpaired forward and astern vision from conning positions; and
- .2 an efficient means of clearing melted ice, freezing rain, snow, mist and spray from outside and accumulated condensation from inside. A mechanical means to clear moisture from the outside face of a window should have operating mechanisms protected from freezing or the accumulation of ice that would impair effective operation.

11 ADDITIONAL GUIDANCE TO CHAPTER 10 (COMMUNICATION)

11.1 Limitations of communication systems in high latitude

11.1.1 Current maritime digital communication systems were not designed to cover Polar waters.

11.1.2 VHF is still largely used for communication at sea, but only over short distances (line of sight) and normally only for voice communication. HF and MF are also used for emergency situations. Digital VHF, mobile phone systems and other types of wireless technology offer enough digital capacity for many maritime applications, but only to ships within sight of shore-based stations, and are, therefore, not generally available in polar waters. AIS could also be used for low data-rate communication, but there are very few base stations, and the satellite-based AIS system is designed for data reception only.

11.1.3 The theoretical limit of coverage for GEO systems is 81.3° north or south, but instability and signal dropouts can occur at latitudes as low as 70° north or south under certain conditions. Many factors influence the quality of service offered by GEO systems, and they have different effects depending on the system design.

11.1.4 Non-GMDSS systems may be available and may be effective for communication in polar waters.

11.2 Advice for the operation of multiple alerting and communication devices in the event of an incident -

11.4 Advice on location and communication equipment to be carried by rescue boats and survival craft

In determining the equipment to be carried for transmitting signals for location, the capabilities of the search and rescue resources likely to respond should be borne in mind. Responding ships and aircraft may not be able to home to 406/121.5 MHz, in which case other locating devices (e.g. AIS-SART) should be considered.

12 A

CHAPTER 2 ±CONTROL OF POLLUTION BY
NOXIOUS LIQUID SUBSTANCES IN BULK

2.1 Operational requirements

2.1.1 In Arctic waters any discharge into the sea of noxious liquid substances (NLS), or mixtures containing such substances, shall be prohibited.

2.1.2 Operation in polar waters shall be taken into account, as appropriate, in the

PART II-B

ADDITIONAL GUIDANCE REGARDING THE PROVISIONS OF THE INTRODUCTION AND PART II-A

1 Additional guidance to chapter 1

1.1 Ships are encouraged to apply regulation 43 of MARPOL Annex I when operating in Arctic waters.

1.2 Non-toxic biodegradable lubricants or water-based systems should be considered in lubricated components located outside the underwater hull with direct seawater interfaces, like shaft seals and slewing seals. to

2 Additional guidance to chapter 2

Category A and B ships, constructed on or after 1 January 2017 and certified to carry noxious liquid substances (NLS), are encouraged to carry NLS identified in chapter 17, column e, as ship type 3 or identified as NLS in chapter 18 of the International Code for the Construction and Equipment of Ships Carrying Dangerous Chemicals in Bulk, in tanks separated from the outer shell by a distance of not less than 760 mm.

3 Additional guidance to chapter 5

In order to minimize the risks associated with animal cargo mortalities, consideration should be given to how animal carcasses will be managed, treated, and stored on board when ships carrying such cargo are operating in polar waters. Reference is made in particular to the 2012 Guidelines for the implementation of MARPOL Annex V (resolution MEPC.219(63), as amended by resolution MEPC.239(65)) and the 2012 Guidelines for the development of garbage management plansion MEPC.ings mad

Table: Example of matters related to anti-fouling systems taken into consideration by some ice-going ships
(this table is used by some operators of ice-going ships)

	Hull	Sea chest
Year round operation in ice-covered polar waters		<ul style="list-style-type: none"> x Abrasion resistant coating. x Compliant with the AFS Convention. Thickness of anti-fouling system to be decided by shipowner.

xAbrasion resistant low friction ice coating.

x

Intermittent operation in ice-covered polar waters

APPENDIX 1

Form of Certificate for Ships operating in Polar Waters

POLAR SHIP CERTIFICATE

This Certificate shall be supplemented by a Record of Equipment for the
Polar Ship Certificate

(Official seal)

(State)

Issued under the provisions of the

International Convention for the Safety of Life at Sea, 1974, as amended

under the authority of the Government of

(name of the State)

by _____
(person or organization authorized)

Particulars of ship

THIS IS TO CERTIFY:

1 That the ship has been surveyed in accordance with the applicable safety-related

Endorsement for advancement of anniversary date where regulation I/14(h) of the Convention applies ²⁹

In accordance with regulation I/14(h) of the Convention, the new anniversary date is

Signed:
(Signature of authorized official)

Place:

Date:
(Seal or stamp of the authority, as appropriate)

In accordance with regulation I/14(h) of the Convention, the new anniversary date is

Signed:
(Signature of authorized official)

Place:

Date:
(Seal or stamp of the authority, as appropriate)

²⁹ Delete as appropriate.

2.3 Communication equipment

1	Sound signaling system mounted to face astern to indicate escort and emergency manoeuvres to following ships as described in the International Code of Signals (for ships intended to provide ice breaking escort).	« « « « « «
2	Voice and/or data communications with relevant rescue coordination centres.
3	Equipment for voice communications with aircraft on 121.5 and 123.1 MHz.
4	Two-way voice and data communication with a Telemedical Assistance Service (TMAS).
5		
5		

APPENDIX 2

Model table of contents for the Polar Water Operational Manual (PWOM)

SAFETY MEASURES

1 Operational capabilities and limitations

Chapter 1 Operation in ice

1.1 Operator guidance for safe operation

Guidance: The PWOM should establish the means by which decisions as to whether ice conditions exceed the ship's design limits should be made, taking into account the operational limitations on the Polar Ship Certificate. An appropriate decision support system, such as the Canada's Arctic Ice Regime Shipping System, and/or the Russian Ice Certificate as described in the Rules of Navigation on the water area of the Northern Sea Route, can be used... Bridge personnel should be trained in the proper use of the system to be utilized. For ships that will operate only in ice-free waters, procedures to ensure that will keep the ship from encountering ice should be established.

1.2 Icebreaking capabilities

Guidance:

The PWOM may include use of a land-based support information provider an effective method of sorting through available information, thereby providing the ship only with information that is relevant, reducing demands on the ship's communications systems. The manual may also indicate instances in which additional images should be obtained and analysed, as well as where such additional information may be obtained.

2.1 Ice information

Guidance: The PWOM should include or refer to guidance on how radar should be used to identify ice floes, how to tune the radar to be most effective, instructions on how to interpret radar images, etc. If other technologies are to be used to provide ice information, their use should also be described.

2.2 Meteorological information

Chapter 3 Verification of hydrographic, meteorological and navigational information

Guidance: The PWOM should provide guidance on the use of hydrographic information as further described in the additional guidance to chapter 10.

Chapter 4 Operation of Special Equipment

4.1 Navigation systems

4.2 Communications systems

Chapter 5 Procedures to maintain equipment and system functionality

5.1 Icing prevention and de-icing

Guidance: The PWOM should provide guidance on how to prevent or mitigate icing by operational means, how to monitor and assess ice accretion, how to conduct de-icing using equipment available on the ship, and how to maintain the safety of the ship and its crew during all of these aspects of the operation.

5.2 Operation of seawater systems

Guidance: The PWOM should provide guidance on how to monitor, prevent or mitigate ice ingestion by seawater systems when operating in ice or in low water temperatures. This may include recirculation, use of low rather than high suctions, etc.

5.3 Procedures for low temperature operations

Guidance: The PWOM should provide guidance on maintaining and monitoring any systems and equipment that are required to be kept active in order to ensure functionality; e.g. by trace heating or continuous working fluid circulation.

Division 3 ±Risk management

Chapter 1 Risk mitigation in limiting environmental condition

1.1 Measures to be considered in adverse ice conditions

Guidance: The PWOM should contain guidance for the use of low speeds in the presence of hazardous ice. Procedures should also be set for enhanced watchkeeping and lookout manning in situations with high risks from ice, e.g. in proximity to icebergs, operation at night, and other situations of low visibility. When possibilities for contact with hazardous ice exist, procedures should address regular monitoring, e.g. soundings/inspections of compartments and tanks below the waterline.

1.2 Measures to be considered in adverse temperature conditions

Guidance: The PWOM should contain guidance on operational restrictions in the event that temperatures below the ships polar service temperature are encountered or forecast. These may include delaying the ship, postponing the conduct of certain types of operation, using temporary heating, and other risk mitigation measures.

Chapter 2 Emergency response

Guidance: In general, where the possibility of encountering low air temperatures, sea ice, and other hazards is present, the PWOM should provide guidance on procedures that will increase the effectiveness of emergency response measures.

2.1 Damage control

Guidance: the PWOM should consider damage control measures arrangements for emergency transfer of liquids and access to tanks and spaces during salvage operations.

2.2 Firefighting

2.3 Escape and evacuation

Guidance:

3.3 Search and rescue

Guidance: The PWOM should contain information on identifying relevant Rescue

